



SVS FASTENERS



FASTENING WITH RELIABILITY




SVS
FASTENERS



BOLTS

DIN | ISO | ASTM
STANDARD BOLTS

HEXAGONAL HEAD SCREW (FULL THREAD)

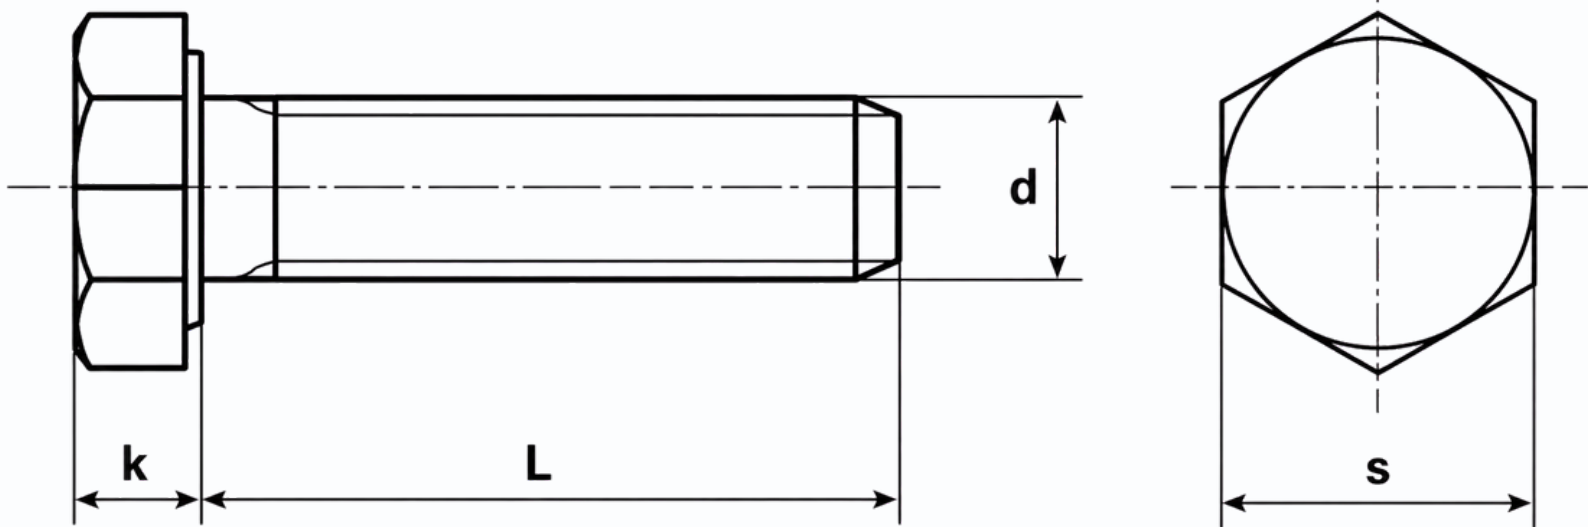


DIN 933

STEEL GRADES: 4.8, 5.8, 6.8, 8.8, 10.9, 12.9
FINISHES: ZP Cr3, YZP, Hot Dip Galvanized, Black

Nom. Dia (d)		M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 22	M 24
Thread pitch		1	1.3	1.5	1.8	2	2	2.5	2.5	2.5	3
K	Nominal	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15
	Min.	3.9	5.2	6.2	7.3	8.6	9.8	11.3	12.3	13.8	14.8
	Max.	4.2	5.5	6.6	7.7	9	10.2	11.7	12.7	14.2	15.2
S	Max.	10	13	17	19	22	24	27	30	32	36
	Min.	9.8	12.7	16.7	18.7	21.7	23.7	26.7	29.7	31.6	35.4
Nom. Dia (d)		M 27	M 30	M 33	M 36	M 39	M 42	M 45	M 48	M 52	M 56
Thread pitch		3	3.5	3.5	4	4	4.5	4.5	5	5	5.5
K	Nominal	17	18.7	21	22.5	25	26	28	30	33	35
	Min.	16.7	18.3	20.6	22.1	24.6	25.6	27.6	29.6	32.5	35
	Max.	17.4	19.1	21.4	22.9	25.4	26.4	28.4	30.4	33.5	35
S	Max.	41	46	50	55	60	65	70	75	80	35
	Min.	40	45	49	53.8	58.8	63.1	68.1	73.1	78.1	35

HEXAGONAL HEAD SCREW (HALF THREAD)


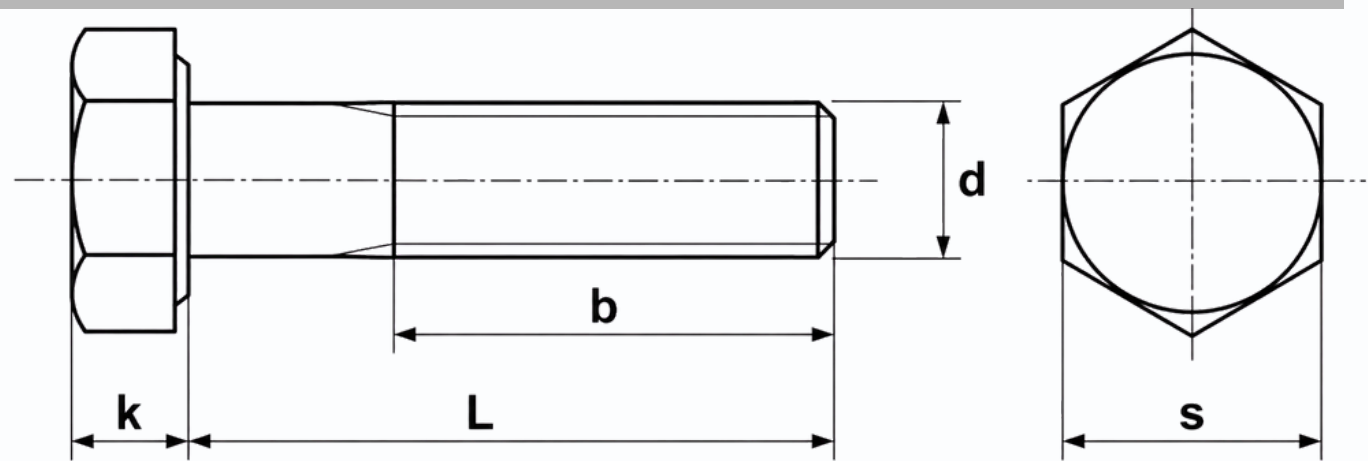


DIN 931

STEEL GRADES: 4.8, 5.8, 6.8, 8.8, 10.9, 12.9
FINISHES: ZP Cr3, YZP, Hot Dip Galvanized, Black

Nom. Dia (d)		M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 22	M 24
Thread pitch		1	1.3	1.5	1.8	2	2	2.5	2.5	2.5	3
Thread Length (b)	L < 125mm	18	22	26	30	34	38	42	46	50	54
	125-200mm	24	28	32	36	40	44	48	52	56	60
	L > 200mm			45	49	53	57	61	65	69	73
K	Nominal	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15
	Min.	3.85	5.15	6.22	7.32	8.62	9.82	11.28	12.28	13.78	14.78
	Max.	4.2	5.5	6.58	7.68	8.98	10.18	11.72	12.72	14.8	15.2
S	Max.	10	13	17	19	22	24	27	30	32	36
	Min.	9.78	12.73	16.73	18.67	21.67	23.67	26.67	26.67	31.61	35.38
Nom. Dia (d)		M 27	M 30	M 33	M 36	M 39	M 42	M 45	M 48	M 52	M 56
Thread pitch		3	3.5	3.5	4	4	4.5	4.5	5	5	5.5
Thread Length (b)	L < 125mm	60	66	72	8	84	90	96	102	110	118
	125-200mm	66	72	78	84	90	96	102	108	116	124
	L > 200mm	79	85	91	97	103	109	115	121	129	137
K	Nominal	17	18.7	21	22.5	25	26	28	29	33	35
	Min.	16.65	18.28	20.58	22.08	24.58	25.58	27.58	29.58	32.5	34.5
	Max.	17.4	19.12	21.42	22.92	25.42	26.42	28.42	30.42	33.5	35.5
S	Max.	41	46	50	55	56	60	70	75	80	85
	Min.	40	45	49	53.8	58.8	63.8	68.1	73.1	78.1	82.8

HEXAGONAL HEAD SCREW

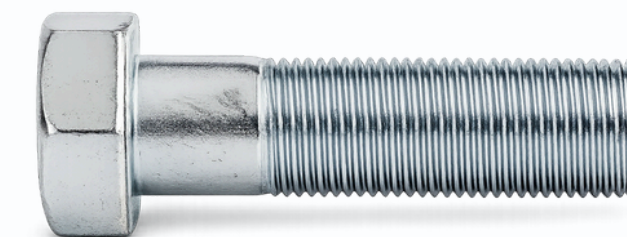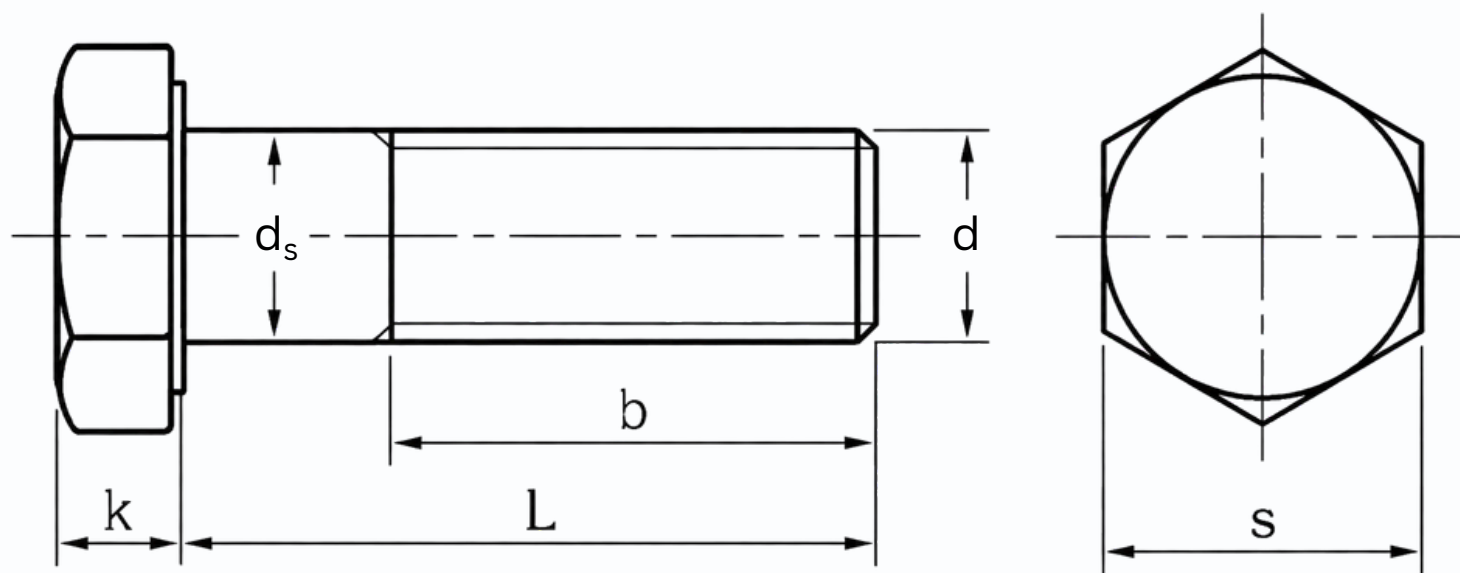


DIN 960

STEEL GRADES: 5.6, 8.8, 10.9, 12.9
FINISHES: ZP CR3, YZP, HOT DIP GALVANIZED, BLACK

THREAD	P	b			ds			K				S		
					MAX	MIN		A		B		MAX	MIN	
		L ≤ 125	125 < L ≤ 200	L > 200		A	B	MAX	MIN	MAX	MIN		A	B
M8	1	22	28	41	8	7.78	7.64	5.45	5.15	5.54	5.06	13	12.73	12.57
M10	1/1.25	26	32	45	10	9.78	9.64	6.58	6.22	6.69	6.11	17	16.73	16.57
M12	1.25/1.5	30	36	49	12	11.73	11.57	7.68	7.32	7.79	7.21	19	18.67	18.48
M14	1.5	34	40	53	14	13.73	13.57	8.98	8.62	9.09	8.51	22	21.67	21.16
M16	1.5	38	44	57	16	15.73	15.57	10.18	9.82	10.29	9.71	24	23.67	23.16
M18	1.5/2	42	48	61	18	17.73	17.57	11.72	11.28	11.85	11.15	27	26.67	26.16
M20	1.5/2	46	52	65	20	19.67	19.48	12.73	12.28	12.85	12.15	30	29.67	29.16
M22	1.5/2	50	56	69	22	21.67	21.48	14.22	13.78	14.35	13.65	32	31.61	31
M24	1.5/2	54	60	73	24	23.67	23.48	15.22	14.78	15.35	14.65	36	35.38	35

CARRIAGE BOLT

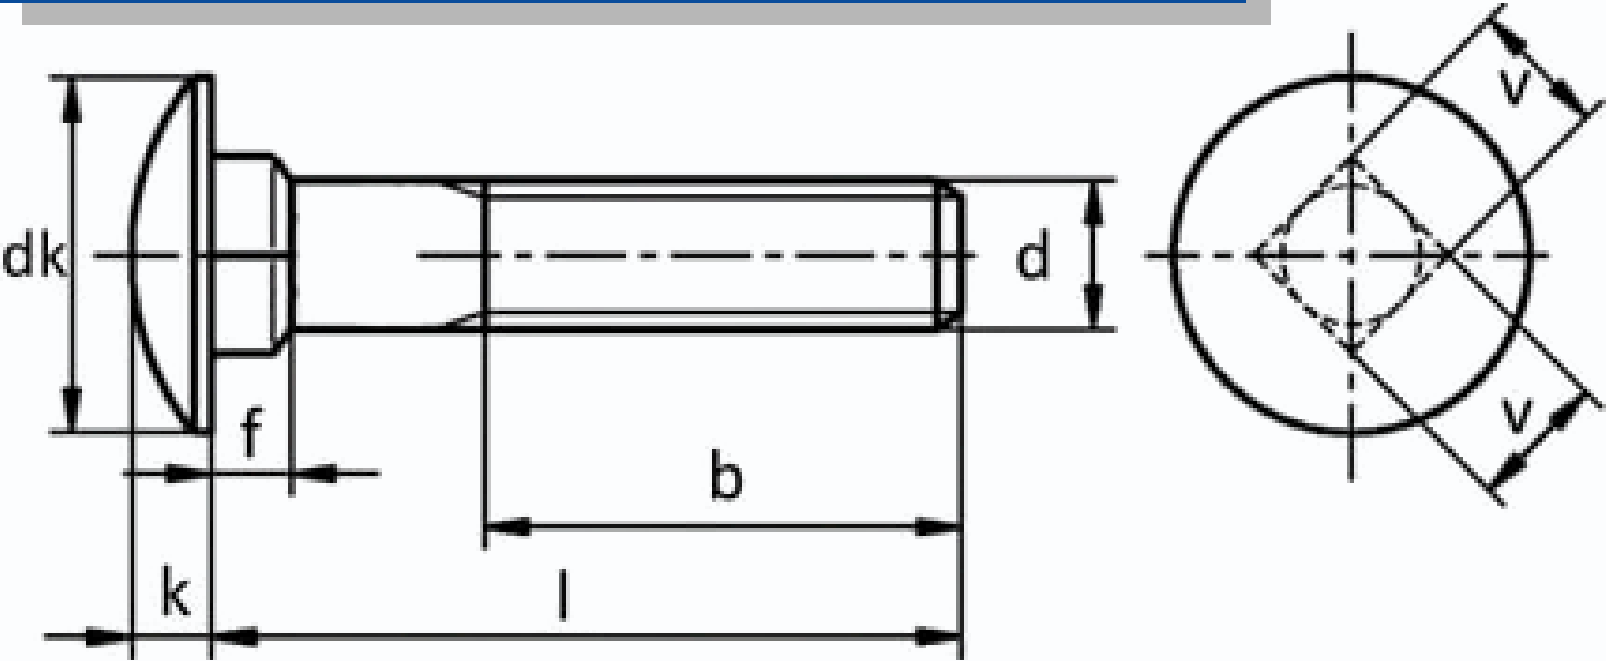


DIN 603

STEEL GRADES: 4.8, 5.8, 6.8, 8.8, 10.9, 12.9
FINISHES: ZP Cr3, YZP, Hot Dip Galvanized, Black

Nom. Dia (d)		M 6	M 8	M 10	M 12	M 16	M 20
Thread pitch		1	1.25	1.5	1.75	2	2.5
Thread Length (b)	L < 125mm	18	22	26	30	38	46
	125-200mm	24	28	32	36	44	52
	L > 200mm		41	45	49	57	65
dk	Max.	16.55	20.65	24.65	30.65	38.8	46.8
f	Max.	4.6	5.6	6.6	8.75	12.9	15.9
k	Max.	3.88	4.88	5.38	6.95	8.95	11.05
v	Max.	6.48	8.58	10.58	12.7	16.7	20.84

FLANGE BOLT ISO


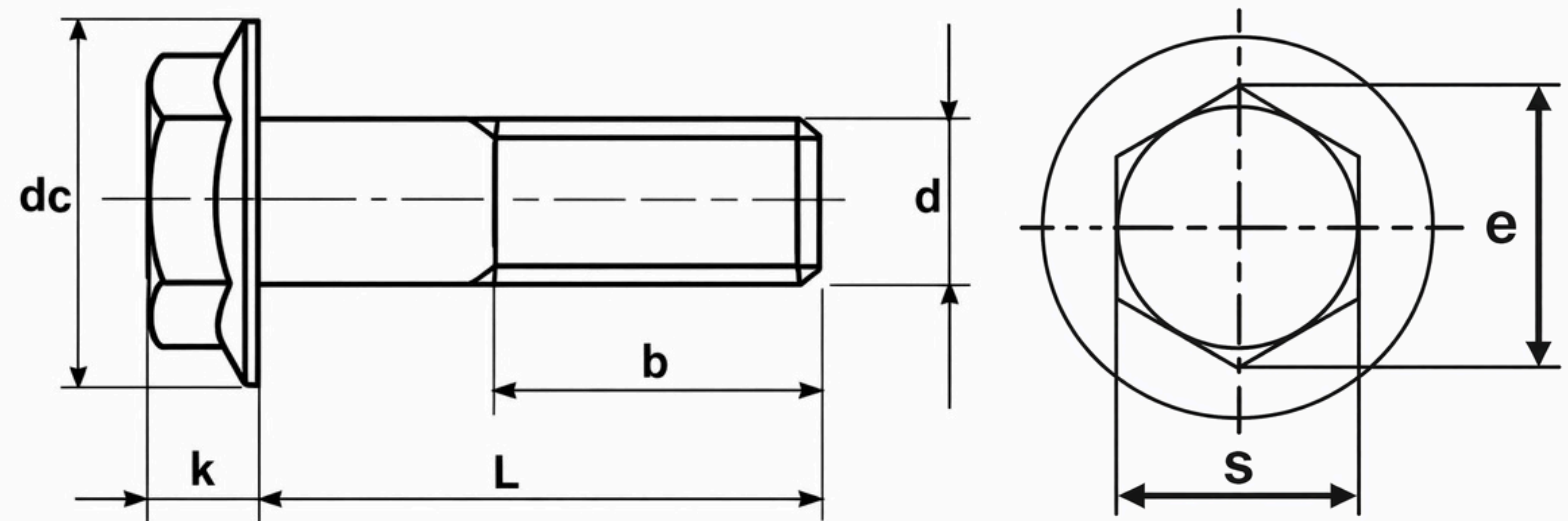


DIN 6921

STEEL GRADES: 4.8, 5.8, 6.8, 8.8, 10.9, 12.9
FINISHES: ZP Cr3, YZP, Hot Dip Galvanized, Black

Nom. Dia (d)		M 6	M 8	M 10	M 12	M 16	M 20
Thread pitch		1	1.25	1.5	1.75	2	2.5
Thread Length (b)	L < 125mm	18	22	26	30	38	46
	125-200mm		28	32	36	44	52
	L > 200mm			45	49	57	65
ds	Min.	6	8	10	12	16	20
	Max	5.82	7.78	9.78	11.73	15.73	19.67
k	Max.	6.6	8.1	9.2	11.5	14.4	17.1
Flange diameter		14.2	18	22.3	26.6	35	43
e	Min.	10.95	14.26	16.5	17.62	23.15	29.87
s	Min.	9.78	12.73	14.73	15.73	20.67	26.67
	Max.	10	13	15	16	21	27

EYE BOLT

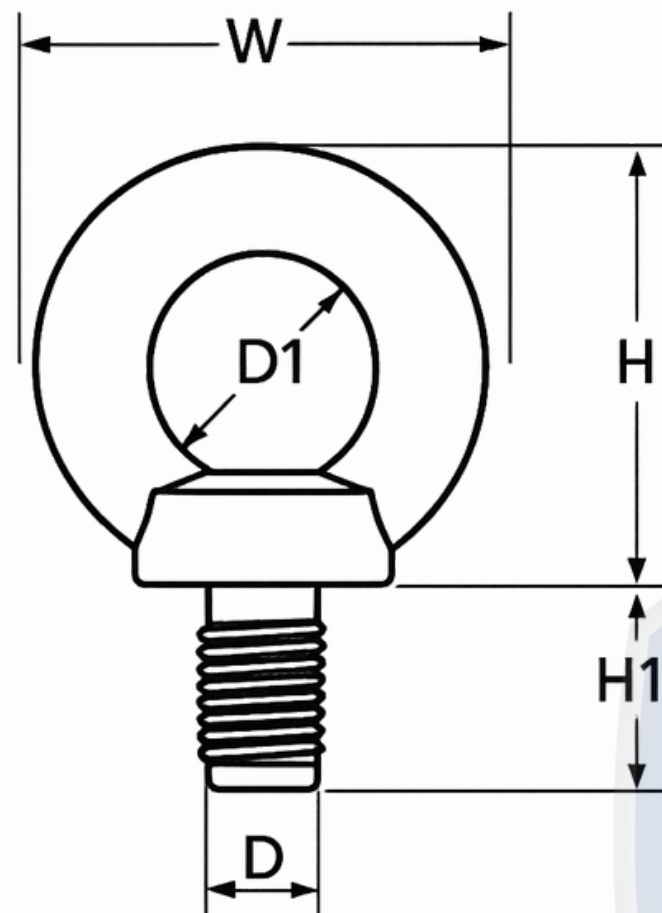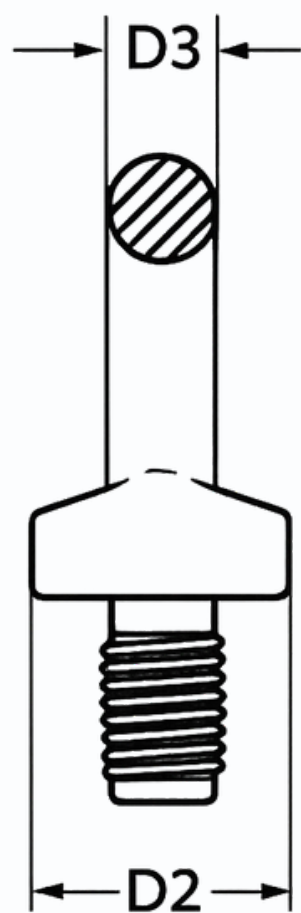

DIN 580


SIZE (mm)	PITCH (mm)	D	D1	D2	D3	H	H1	W
M6	1	6	20	20	8	36	13	36
M8	1.25	8	20	20	8	36	13	36
M10	1.5	10	25	25	10	45	17	45
M12	1.75	12	30	30	12	53	20	54

U BOLT

Pipe Size		Thread size	Centres (N)	(M)	Thread Length (K)
Nominal	Outside				
NB	mm		mm	mm	mm
15	21.3	M 8	40	50	25
20	26.7	M 8	45	55	25
25	33.4	M 8	50	60	30
32	42.2	M 8	60	70	30
40	48.3	M 10	65	80	40
50	60.3	M 10	80	100	40
65	76.1	M 12	95	120	50
80	88.9	M 16	110	140	55
100	114.3	M 16	140	165	55
125	141.3	M 16	165	190	55
150	168.3	M 20	195	225	65
175	193.7	M 20	220	280	65
200	219.1	M 20	250	275	65
225	244.5	M 20	275	300	65
250	273	M 20	305	335	75
300	323.9	M 20	355	385	75
350	355.6	M 24	390	425	80
400	406.4	M 24	440	475	80
450	457.2	M 24	495	525	80
500	508	M 24	545	575	80
550	559	M 24	595	625	80
600	609.6	M 24	645	675	80



DIN 3570

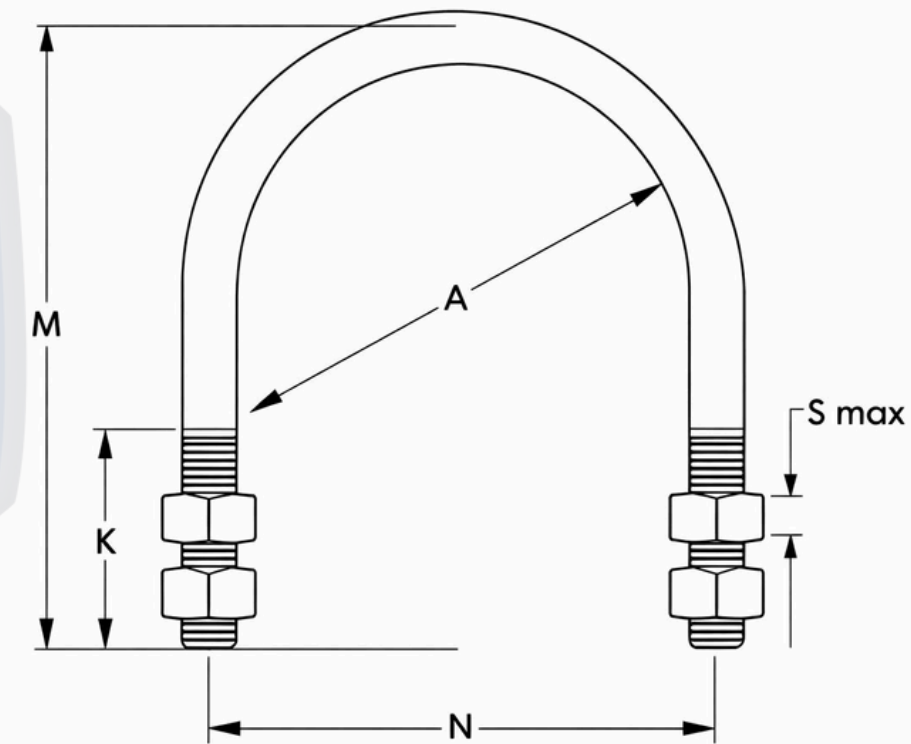

STEEL GRADES: 4.8, 5.8, 6.8, 8.8

FINISHES: ZP Cr3, YZP, Hot Dip Galvanized, Black




SVS
FASTENERS



NUTS

DIN | ISO | ASTM
STANDARD NUTS

HEX NUT

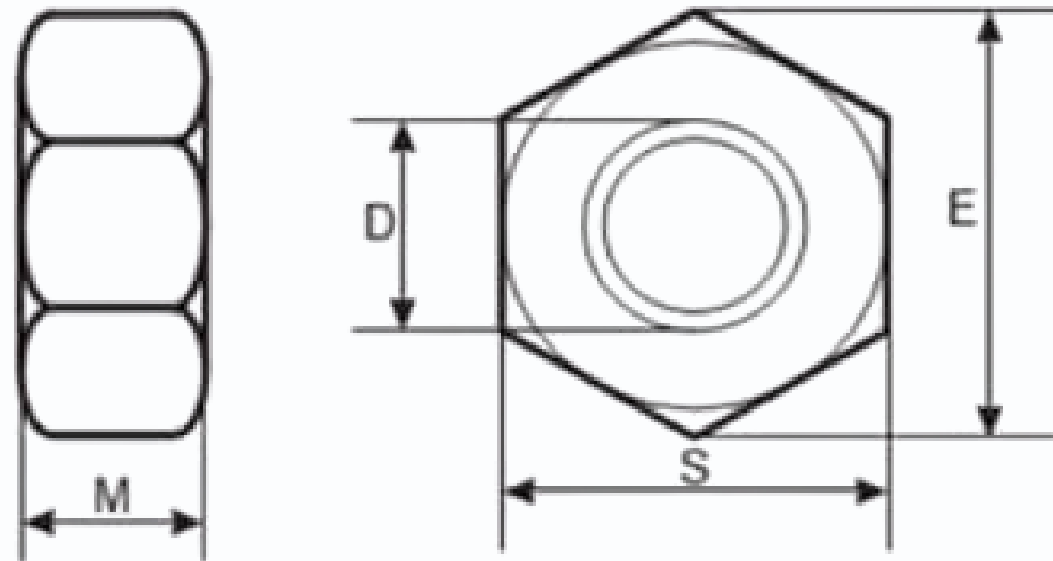

DIN 934

Steel Grades : 5 , 8 , 10

Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

Thread D		M 6	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 22	M 24	M 27
P		1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3
E	Min.	11.1	14.4	17.8	20	23.4	26.8	29.6	33	37.3	39.6	45.2
M	Max.	5.2	6.8	8.4	10.8	12.8	14.8	15.8	18	19.4	21.5	23.8
	Min.	4.9	6.4	8	10.4	12.1	14.1	15.1	16.9	18.1	20.2	22.5
S	Max.	10	13	16	18	21	24	27	30	34	36	41
	Min.	9.8	12.7	15.7	17.7	20.7	23.7	26.2	29.2	33	35	40



Thread D		M 30	M 33	M 36	M 39	M 42	M 45	M 48	M 52	M 56	M 60
P		3.5	3.5	4	4	4.5	4.5	5	5	5.5	5.5
E	Min.	50.9	55.4	60.8	66.4	71.3	77	82.6	88.3	93.6	99.2
M	Max.	25.6	28.7	31	33.4	34	36	38	42	45	48
	Min.	24.3	27.4	29.4	31.8	32.4	34.4	36.4	40.4	43.4	46.4
S	Max.	46	50	55	60	65	70	75	80	85	90
	Min.	45	49	53.8	58.8	63.1	68.1	73.1	78.1	82.8	87.8

LOCK HEX NUT

D	S	E	M	WEIGHT IN KG(s) PER 1000 PCS
M2	4	4.32	1.2	0.23
M3	5.5	6.08	1.8	0.29
M4	7	7.74	2.2	0.57
M5	8	8.87	2.7	0.83
M6	10	11.05	3.2	1.6
M8	13	14.38	4	3.2
M10	17	18.9	5	7.2
M12	19	21.1	6	10.4
M16	24	26.75	8	20.5
M20	30	33.53	10	0.2
M24	36	39.98	12	69.5
M30	46	51.28	15	139
M36	55	61.31	18	244
M42	65	72.61	21	403
M48	75	83.91	24	617



DIN 439

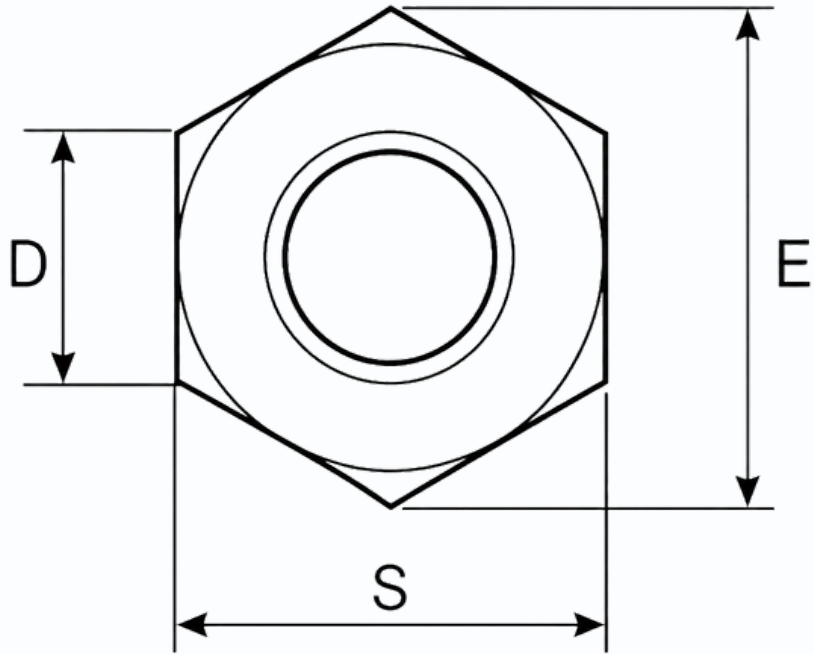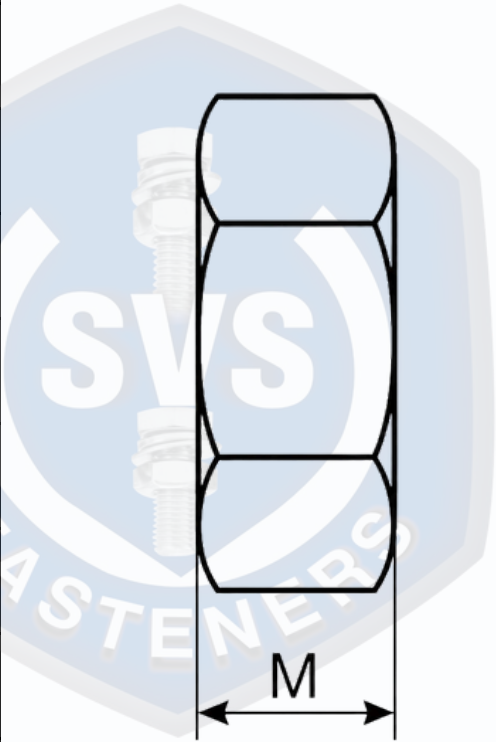


Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

HEXAGONAL THIN NUT

D	Pitch P	m		s		Weight per 1000 pcs(kg)
		max	min	max	min	
M8	1/1.25	5	4.7	13	12.73	4
M10	1/1.25/1.5	6	5.7	17	16.73	8.6
M12	1.25/1.5/1.75	7	6.64	19	18.67	12.1
M14	1.5/2	8	7.42	22	21.67	18.2
M16	1.5/2	8	7.42	24	23.67	20.1
M18	1.5/2/2.5	9	8.42	27	26.16	29.6
M20	1.5/2/2.5	9	8.42	30	29.16	36.3
M22	1.5/2/2.5	10	9.1	32	31	43.8
M24	1.5/2/3	10	9.1	36	35	58
M27	1.5/2/3	12	10.9	41	40	90
M30	1.5/2/3.5	12	10.9	46	45	110
M33	1.5/2/3.5	14	12.9	50	49	155
M36	1.5/2/3/4	14	12.9	55	53.8	190
M39	1.5/2/3/4	16	14.9	60	58.8	260
M42	1.5/2/3/4.5	16	14.9	65	63.1	307
M45	1.5/2/3/4.5	18	16.9	70	68.1	400
M48	1.5/2/3/5	18	16.9	75	73.1	460
M52	1.5/2/3/5	20	18.7	80	78.1	580



DIN 936

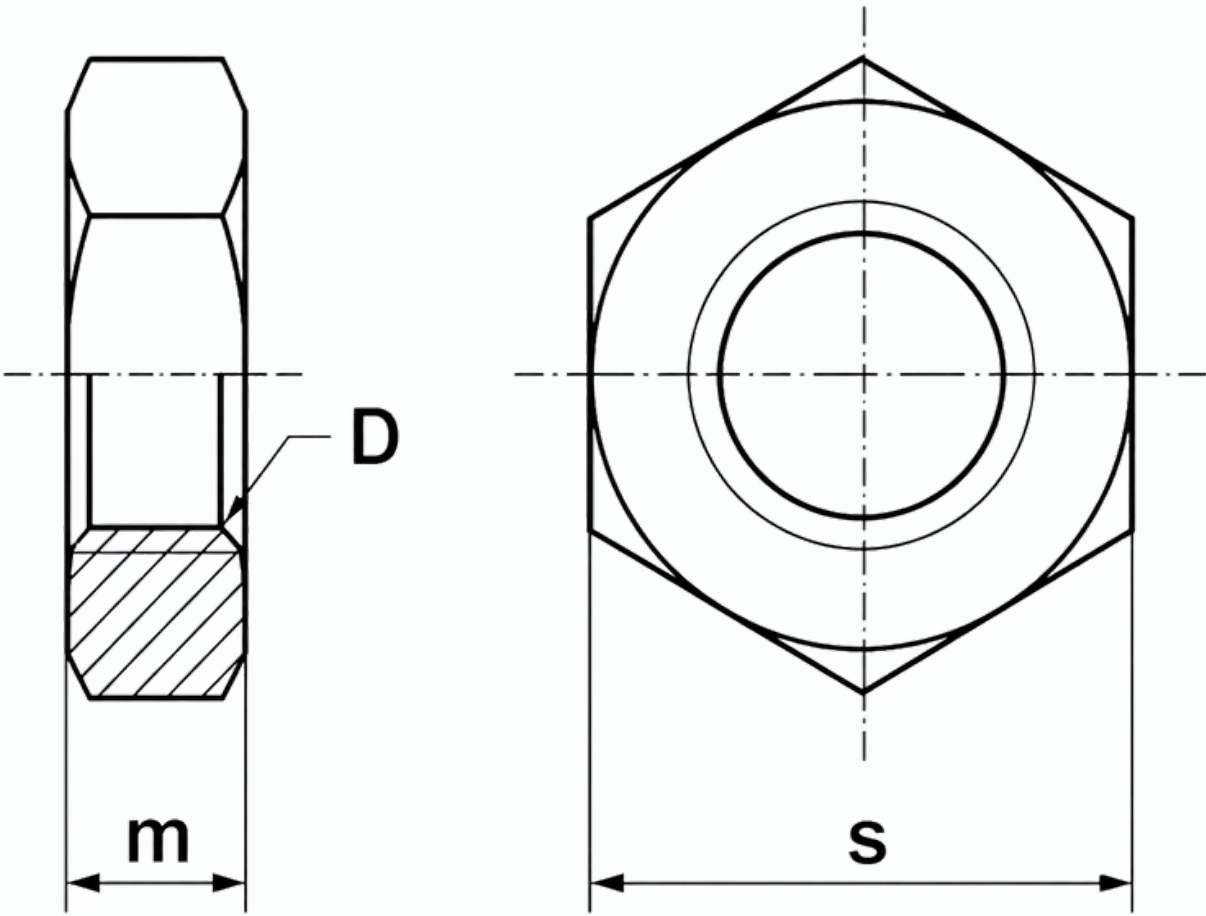



Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

DOME NUT

Size	s		e	h		m	
	Min	Max	Min	Min	Max	Min	Max
M4	6.78	7	7.66	7.64	8	2.9	3.2
M5	7.78	8	8.79	9.64	10	3.7	4
M6	9.78	10	11.05	11.57	12	4.7	5
M8	12.73	13	14.38	14.57	15	6.14	6.5
M10	16.73	17	18.9	17.57	18	7.64	8
M12	18.73	19	21.1	21.48	22	9.64	10
M14	21.67	22	24.49	24.48	25	10.3	11
M16	23.67	24	26.75	27.48	28	12.3	13
M18	26.67	27	30.14	31.38	32	14.3	15
M20	29.67	30	33.53	33.38	34	14.9	16
M22	31.61	32	35.72	38.38	39	16.9	18
M24	35.38	36	39.98	41.38	42	17.7	19



DIN 1587

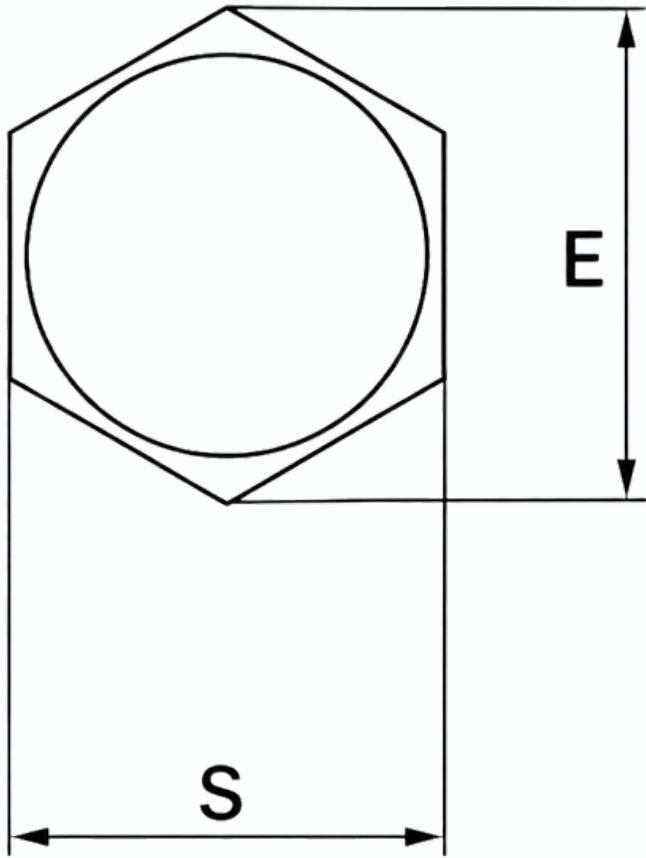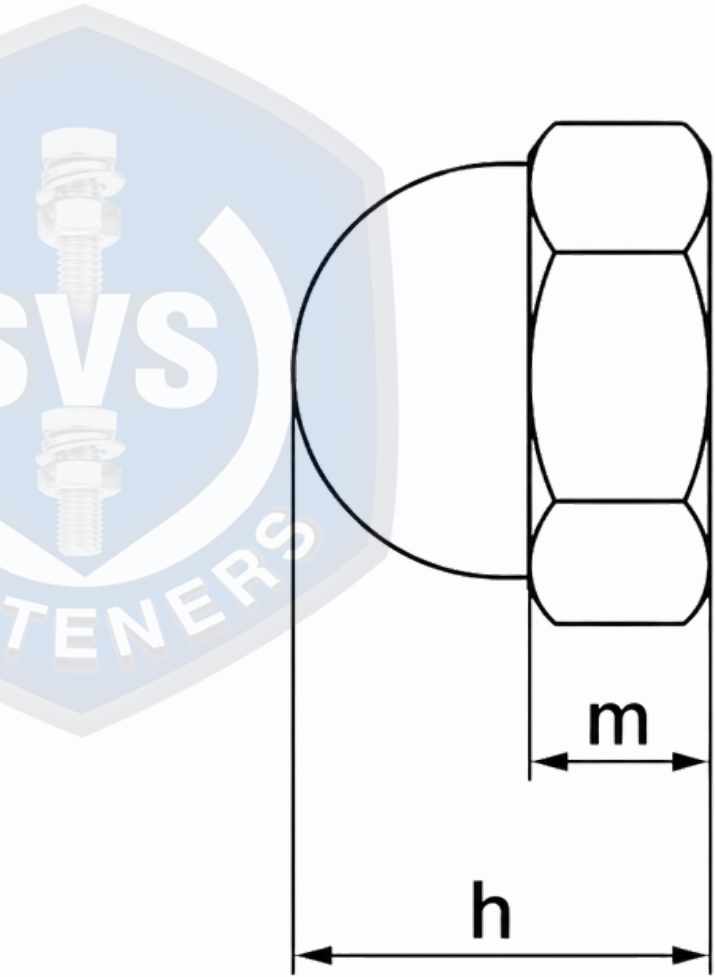


Finishes :plain/bright finish, electro-zinc plating, nickel or chrome plating and black oxide or passivated stainless steel

WING NUT

D1	D2 max	E max	G max	H max	A	Weight kg/1000pcs
M4	8	20	1.9	10.5	8	2
M5	11	26	2.3	13	10	3.5
M6	13	33	2.3	17	12	5.9
M8	16	39	2.8	20	16	8.7
M10	20	51	4.4	25	20	14.8
M12	23	65	4.9	33.5	23	37.8
M14	28	72	6	36	23	75
M16	29	73	6.4	37.5	28	86
M20	35	90	6.9	46.5	36	45
M24	44	110	9.4	56.5	45	260



DIN 315

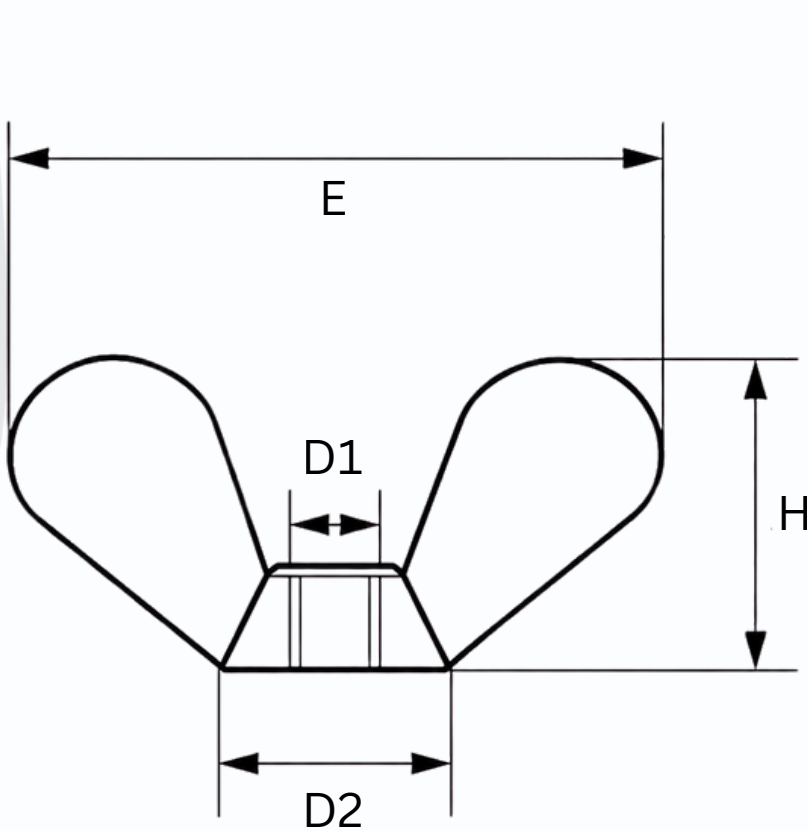



Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

EYE NUT

d1	d2	d3	d4	p	h	k
M 8	20	36	20	1.3	36	8
M 10	25	45	25	1.5	45	10
M 12	30	54	30	1.8	53	12
M 16	35	63	35	2	62	14
M 20	40	72	40	2.5	71	16
M 24	50	90	50	3	90	20
M 30	65	108	60	3.5	109	24
M 36	75	126	70	4	128	29
M 42	85	144	80	4.5	147	32





DIN 582

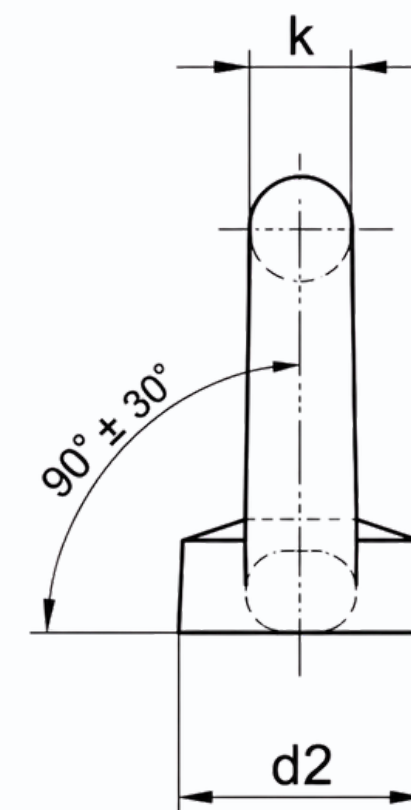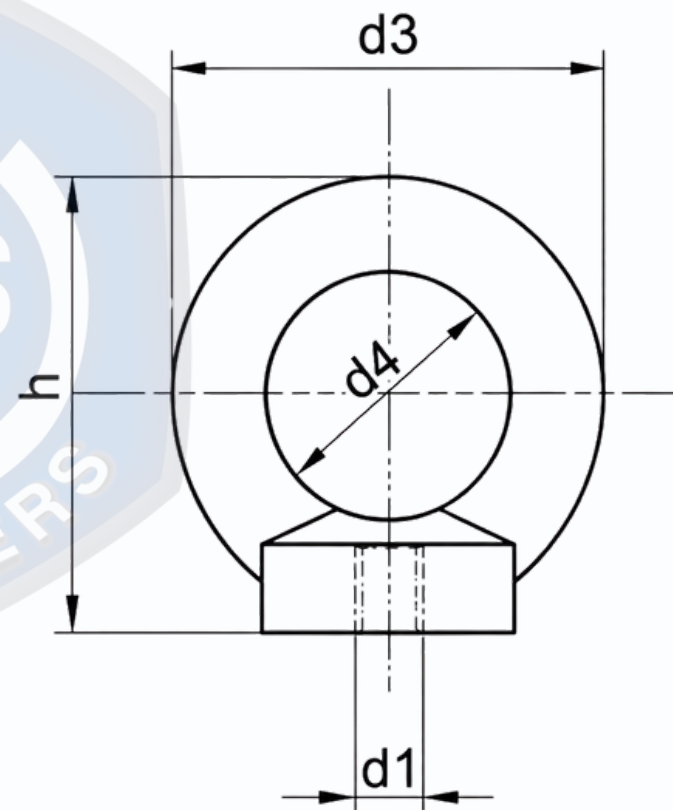

FINISHES: ZP Cr3, YZP, Hot dip Galvanized, Black

FLANGE NUT

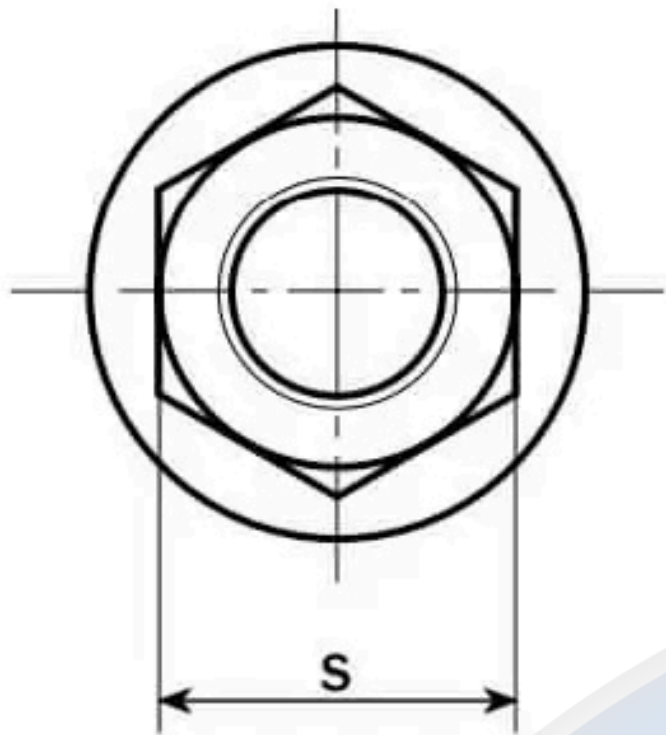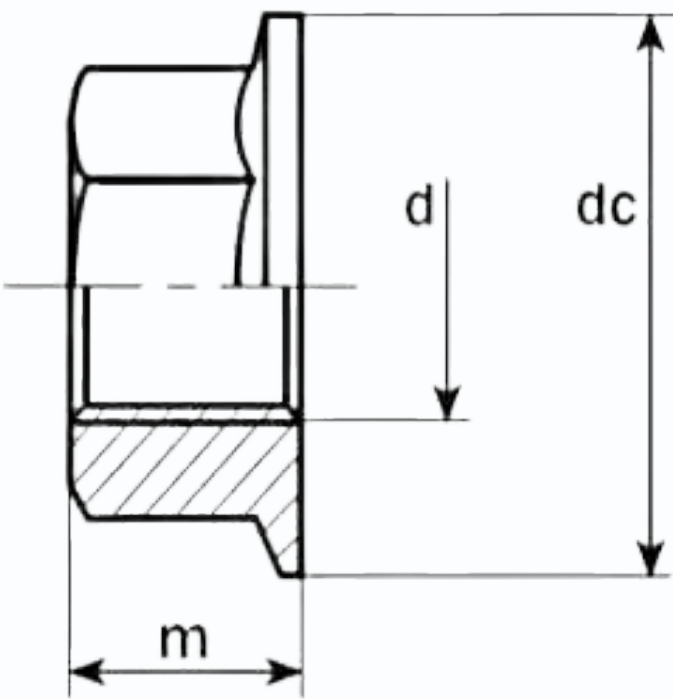

DIN 6923

FINISHES: ZP Cr3, YZP, Hot dip Galvanized, Black

D	Pitch P	dc Max.	M		S	
			Max.	Min.	Max.	Min.
M 6	1	14.5	6	5.7	10	9.78
M 8	1 / 1.25	17.9	8	7.6	13	12.73
M 10	1 / 1.25 / 1.5	21.8	10	9.6	15	14.73
M 12	1.25 / 1.5 / 1.75	26	12	11.6	18	17.73
M 14	1.5 / 2	29.9	14	13.3	21	20.67
M 16	1.5 / 2	34.5	16	15.3	24	23.67
M 20	1.5 / 2.5	42.8	20	18.9	30	29.67




SVS
FASTENERS



WASHERS

DIN | ISO | ASTM
STANDARD WASHERS

WASHER

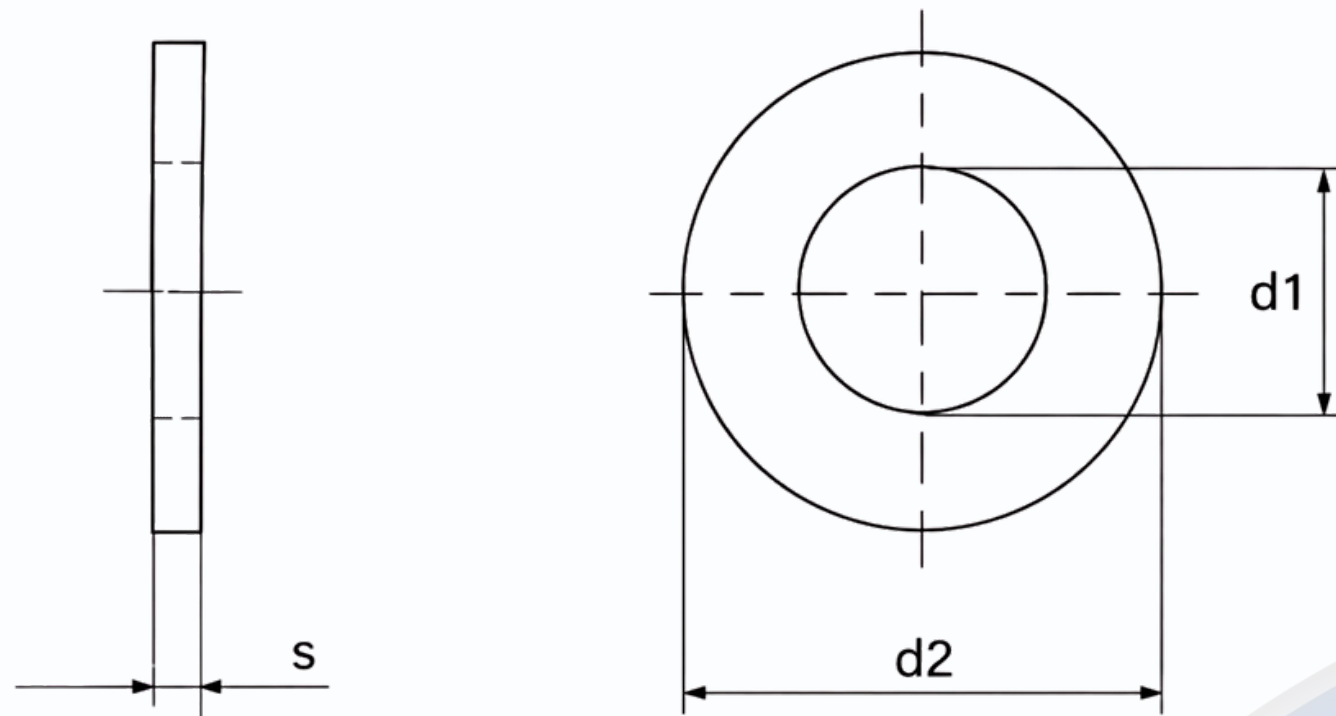


DIN 125

Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

D Nom.	M 6	M 7	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 22	M 24
D 1	6.4	7.4	8.4	10.5	13	15	17	19	21	23	25
D 2	12	14	16	20	24	28	30	34	37	39	44
S	1.6	1.6	1.6	2	2.5	2.5	3	3	3	3	4
D Nom.	M 27	M 30	M 33	M 36	M 39	M 42	M 45	M 48	M 52	M 56	M 60
D 1	28	31	34	37	40	43	46	50	54	58	62
D 2	50	56	60	66	72	78	85	92	98	105	110
S	4	4	5	5	6	7	7	8	8	9	9

FENDER WASHER

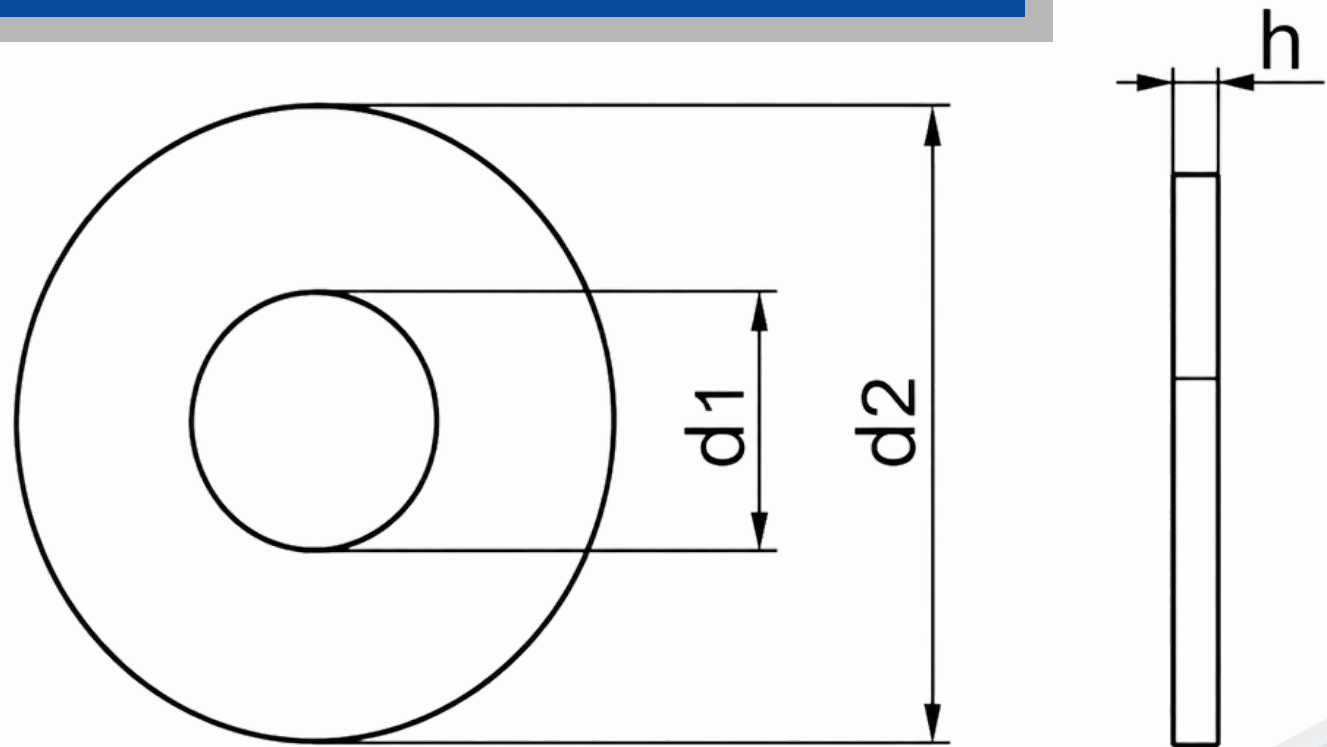

DIN 9021

Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black


Nom Size (Thread size)		M 6	M 7	M 8	M 10	M 12	M 14	M 16	M 18	M 20	M 24	M 30	M 36
d 1	Min.	6.4	7.4	8.4	10.5	13	15	17	20	22	26	33	39
	Max.	6.62	7.62	8.62	10.77	13.27	15.27	17.27	20.52	22.52	26.84	34	40
d 2	Min.	17.57	21.48	23.48	19.48	36.38	43.38	49.38	54.1	58.1	70.1	89.8	107.8
	Max.	18	22	24	30	37	44	50	56	60	72	92	110
h	Min.	1.4	1.8	1.8	2.3	2.7	2.7	2.7	3.4	3.4	4	5	6.8
	Max.	1.8	2.2	2.2	2.7	3.3	3.3	3.3	4.6	4.6	6	7	9.2

SPLIT LOCK WASHER

Nominal Diameter	D		D 1	B	S	H	
	Min.	Max.	Max.			Min.	Max.
M 6	6.4	6.5	11.8	2.5 ± 0.15	1.6 ± 0.1	3.2	3.8
M 7	7.1	7.5	12.8	2.5 ± 0.15	1.6 ± 0.1	3.2	3.8
M 8	8.1	8.5	14.8	3 ± 0.15	2 ± 0.1	4	4.7
M 10	10.2	10.7	18.1	3.5 ± 0.2	2.2 ± 0.15	4.4	5.2
M 12	12.2	12.7	21.1	4 ± 0.2	2.5 ± 0.15	5	5.9
M 14	14.2	14.7	24.1	4.5 ± 0.2	2.5 ± 0.15	6	7.1
M 16	16.2	17	27.4	5 ± 0.2	3 ± 0.15	7	8.3
M 18	18.2	19	29.4	5 ± 0.2	3.5 ± 0.2	7	8.3
M 20	20.2	21	33.6	6 ± 0.2	3.5 ± 0.2	8	9.4
M 22	22.5	23.5	35.9	6 ± 0.2	4 ± 0.2	8	9.4
M 24	24.5	25.5	40	7 ± 0.25	5 ± 0.2	10	11.8
M 27	27.5	28.5	43	7 ± 0.25	5 ± 0.25	10	11.8
M 30	30.5	31.7	48.2	8 ± 0.25	6 ± 0.25	12	14.2
M 36	36.5	37.7	58.2	10 ± 0.25	6 ± 0.25	12	14.2
M 39	39.5	40.7	61.2	10 ± 0.25	6 ± 0.25	12	14.2
M 42	42.5	43.7	66.2	12 ± 0.25	7 ± 0.25	14	16.5
M 45	45.5	46.7	71.2	12 ± 0.25	7 ± 0.25	14	16.5
M 48	49	50.6	75	12 ± 0.25	7 ± 0.25	14	16.5
M 52	53	54.6	83	14 ± 0.25	8 ± 0.25	16	18.9
M 56	57	58.5	87	14 ± 0.25	8 ± 0.25	16	18.9
M 60	61	62.5	91	14 ± 0.25	8 ± 0.25	16	18.9



DIN 127

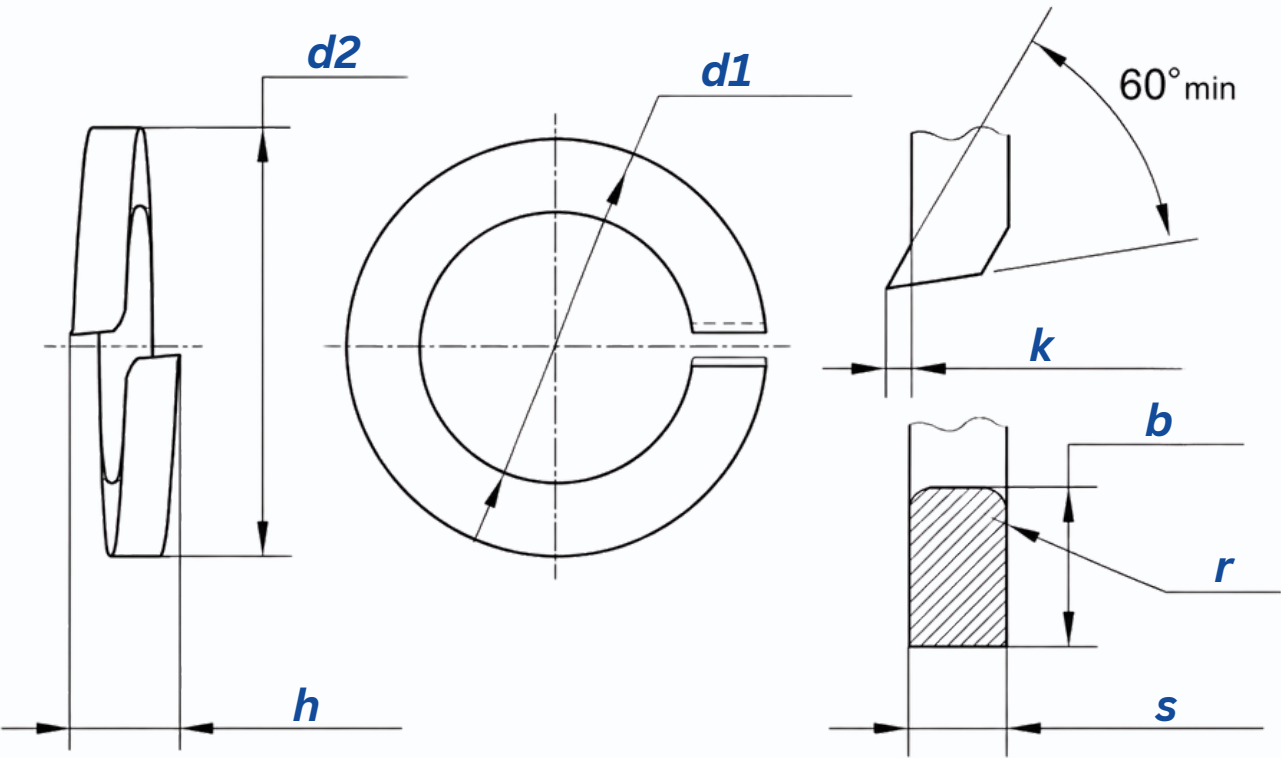


Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

WIDE-FLANGED FLAT WASHER

Thread size	Nominal	d1		d2	s		h		r	Mass per 1000 units (kg)
		MAX	MIN	MAX		LIMIT	MAX	MIN		
M3	3	3.4	3.1	5.6	1	±0.1	2.36	2	0.2	0.105
M3.5	3.5	3.9	3.6	6.1	1	±0.1	2.36	2	0.2	0.114
M4	4	4.4	4.1	7	1.2	±0.1	2.83	2.4	0.2	0.195
M5	5	5.4	5.1	8.8	1.6	±0.1	3.78	3.2	0.2	0.37
M6	6	6.5	6.1	9.9	1.6	±0.1	3.78	3.2	0.3	0.425
M8	8	8.5	8.1	12.7	2	±0.1	4.72	4	0.5	1.05
M10	10	10.7	10.2	16	2.5	±0.15	5.9	5	0.8	1.96
M12	12	12.7	12.2	18	2.5	±0.15	5.9	5	0.8	2.28
M14	14	14.7	14.2	21.1	3	±0.2	7.1	6	1	3.8
M16	16	17	16.2	24.4	3.5	±0.2	8.25	7	1	5.94
M18	18	19	18.2	26.4	3.5	±0.2	8.25	7	1	6.6
M20	20	21.2	20.2	30.6	4.5	±0.2	10.6	9	1	12.3
M22	22	23.5	22.5	32.9	4.5	±0.2	10.6	9	1	13.6
M24	24	25.5	24.5	35.9	5	±0.2	11.8	10	1.6	18.1
M27	27	28.5	27.5	38.9	5	±0.2	11.8	10	1.6	20.6
M30	30	31.7	30.5	44.1	6	±0.2	14.2	12	1.6	32
M33	33	34.7	33.5	47.1	6	±0.2	14.2	12	1.6	35
M36	36	37.7	36.5	52.2	7	±0.25	16.5	14	1.6	52.5
M42	42	43.7	42.5	60.2	8	±0.25	18.9	16	2	80
M48	48	50.5	49	67	8	±0.25	18.9	16	2	90



DIN 7980

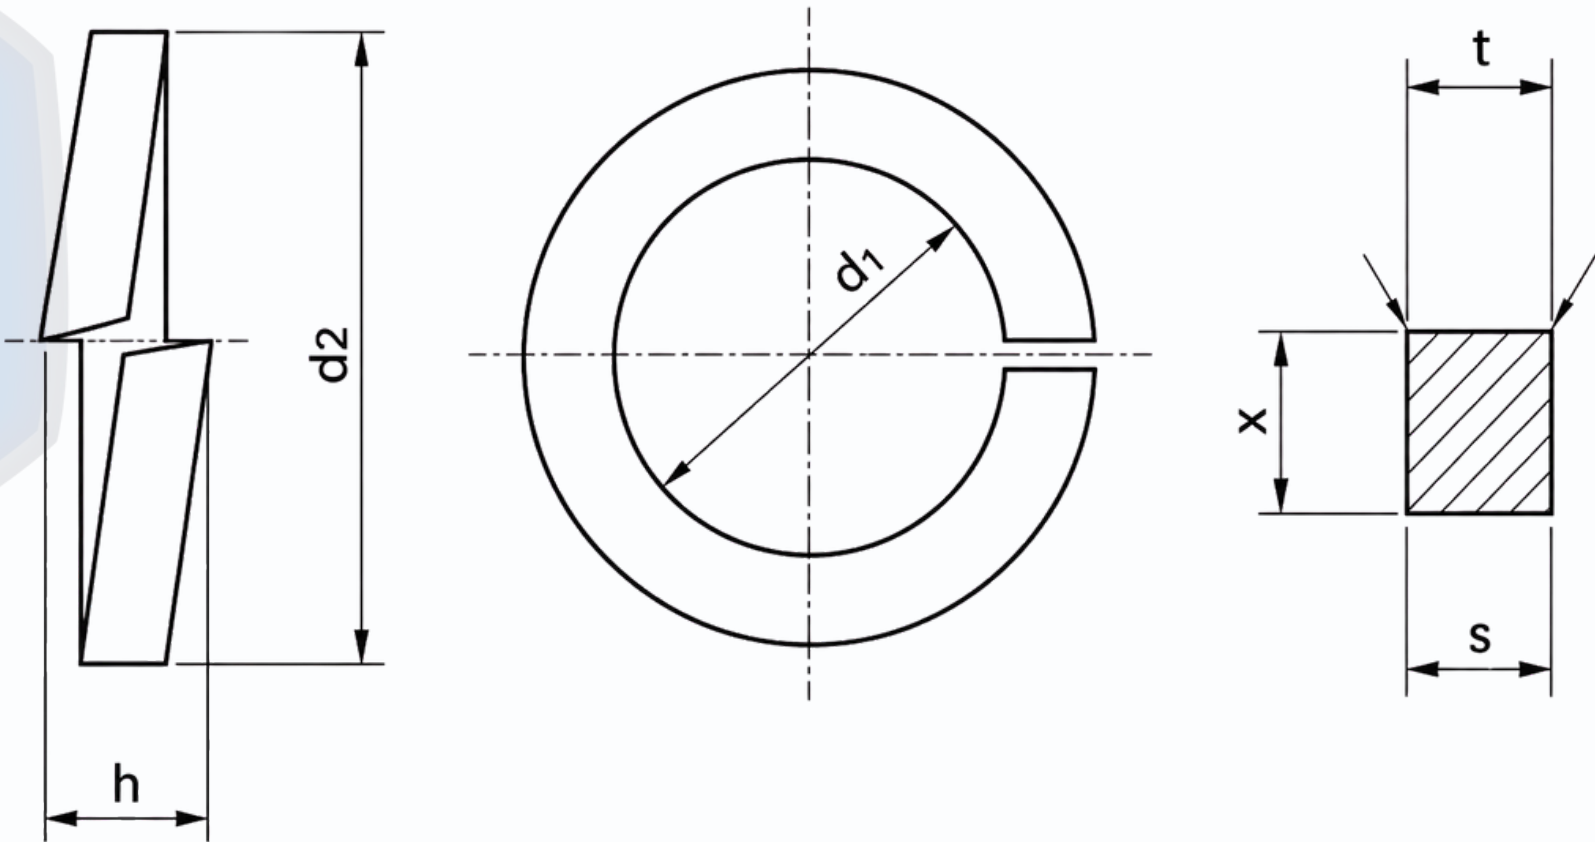



Finishes : plain (black/uncoated), electro zinc-plated, mechanically deposited zinc, and bright stainless steel

SPRING WASHER

Nominal size	d1	d2	s	h		weight kg/1000 pcs	for thread
	h14	h14		MAX	MIN		
2	2.2	5	0.4	0.6	0.5	0.05	M2
2.5	2.7	6	0.5	0.72	0.61	0.09	M2.5
3	3.2	7	0.6	0.85	0.72	0.14	M3
3.5	3.7	8	0.8	1.06	0.92	0.25	M3.5
4	4.3	9	1	1.3	1.12	0.38	M4
5	5.3	11	1.2	1.55	1.35	0.69	M5
6	6.4	14	1.5	2	1.7	1.43	M6
7	7.4	17	1.75	2.3	2	2.53	M7
8	8.4	18	2	2.6	2.4	3.13	M8
10	10.5	23	2.5	3.2	2.8	6.45	M10
12	13	29	3	3.95	3.43	12.4	M12
14	15	35	3.5	4.65	4.04	21.6	M14
16	17	39	4	5.25	4.58	30.4	M16
18	19	42	4.5	5.6	5.08	38.9	M18
20	21	45	5	6.4	5.6	48.8	M20
22	23	49	5.5	7.05	6.15	63.5	M22
24	25	56	6	7.75	6.77	92.9	M24
27	28	60	6.5	8.35	7.3	113	M27
30	31	70	7	9.2	8	170	M30



DIN 6796

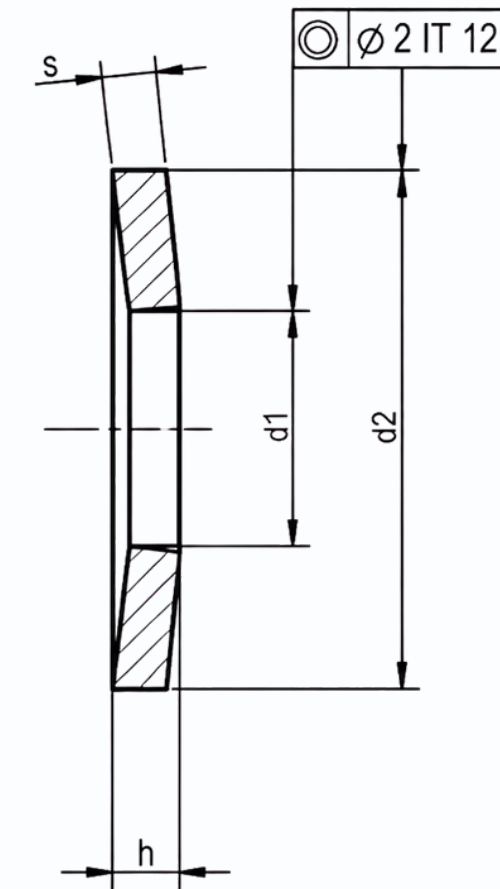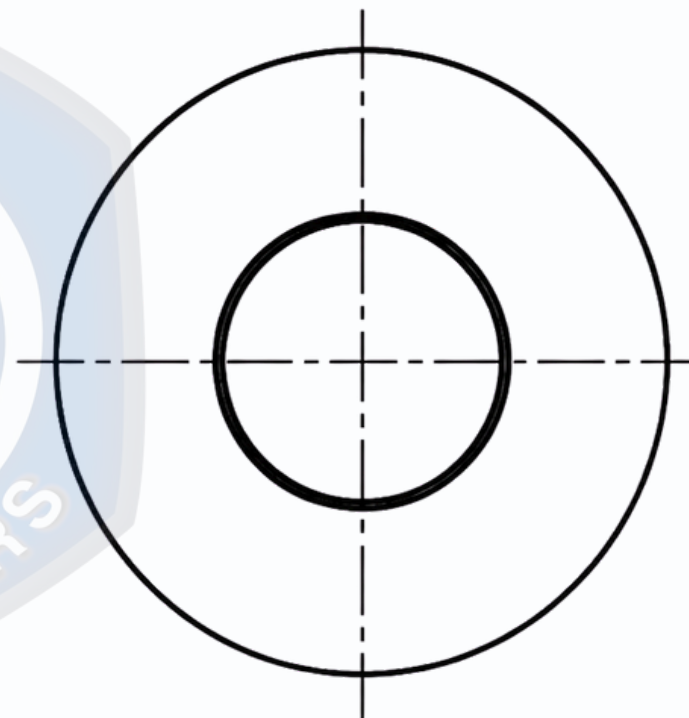

Finishes : plain (black/uncoated), electro zinc-plated, mechanically deposited zinc, and bright stainless steel



SVS
FASTENERS





THREADED RODS

DIN | ISO | ASTM
STANDARD THREADED RODS

THREADED ROD

Thread Size D		Length	Weight kg/1000pcs
M6	M6-1.0	1000±10	177
M8	M8-1.25	1000±10	319
M10	M10-1.5	1000±10	500
M12	M12-1.75	1000±10	725
M14	M14-2	1000±10	970
M16	M16-2	1000±10	1330
M18	M18-2.5	1000±10	1650
M20	M20-2.5	1000±10	2080
M22	M22-2.5	1000±10	2540
M24	M24-3	1000±10	3000
M27	M27-3	1000±10	3850
M30	M30-3.5	1000±10	4750
M33	M33-3.5	1000±10	5900
M36	M36-4	1000±10	3900
M39	M39-4	1000±10	8200
M42	M42-4.5	1000±10	9400
M45	M45-4.5	1000±10	11000
M48	M48-5	1000±10	12400
M52	M52-5	1000±10	14700

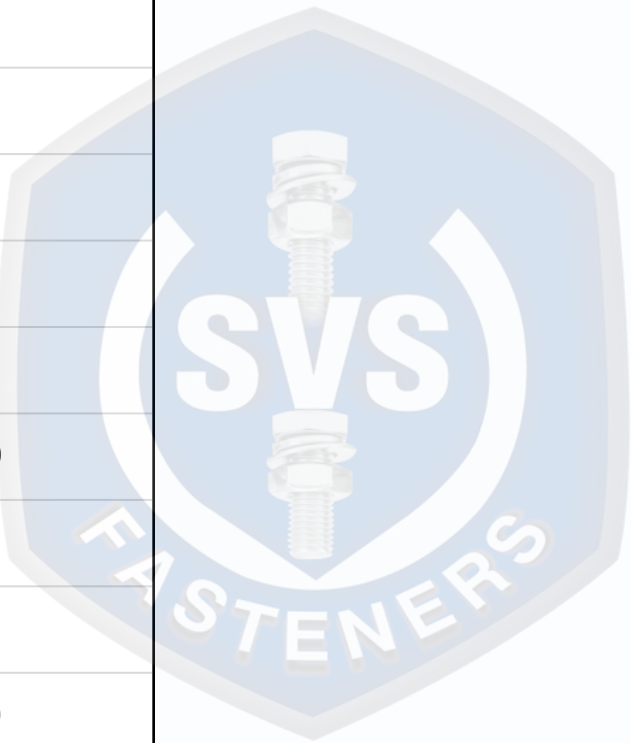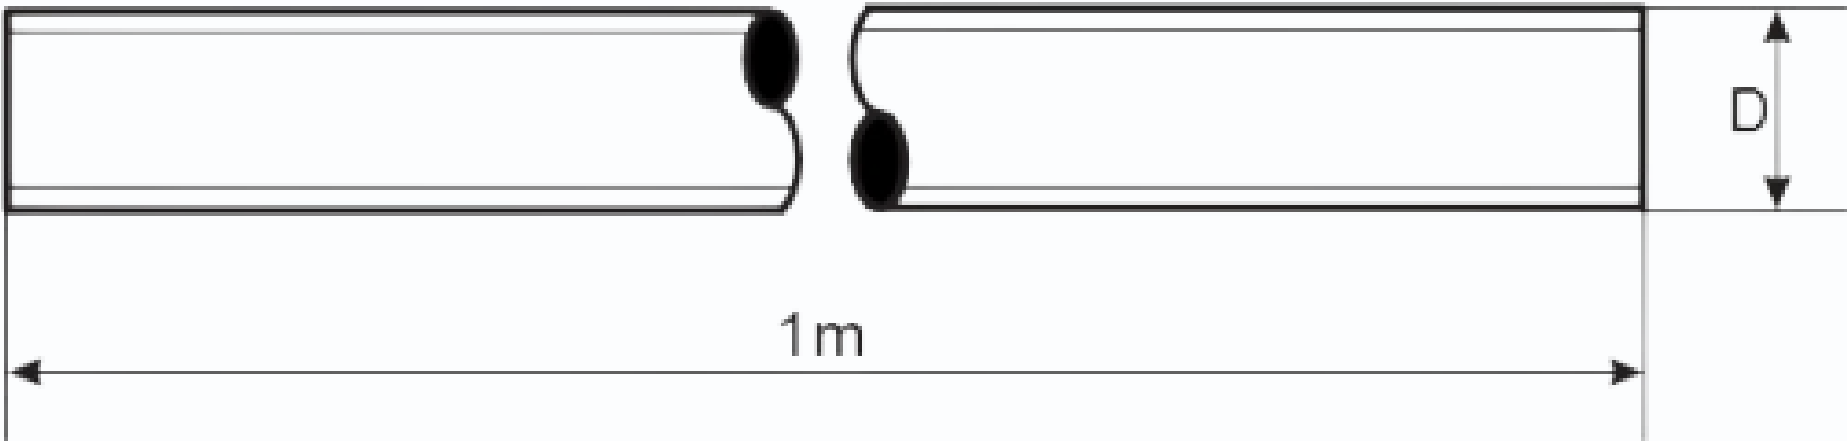

DIN 975

Steel Grades : 4.8, 8.8, 10.9

Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black

SPECIAL ITEMS



J BOLT



T BOLT



L BOLT



S HOOK



HAMMER BOLT

Finishes : ZP Cr3, YZP, Hot dip Galvanized, Black



SVS FASTENERS



Village Kaddon, Tehsil Payal, Doraha,
Ludhiana – 141421, India



www.svsfasteners.com



Tel:- +91-7009987687 , +91-7009851537



info@svsfasteners.com



kesar@svsfasteners.com